

Miniature Current Transformers

Primary Single-Turn (LB2) Series

The series of LB2 Miniature current transformers are designed specifically for integration into products which require exceptionally accurate primary signal transformation while exposed to harsh environmental operating conditions. An internal precision resistor across the secondary winding of the CT provides a low safe voltage output. It can save time and the installation costs.



◆ Features

- Primary Single-Turn
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations

◆ Applications

- Current measurement, monitoring and protection for electrical wiring and equipment.
- Instrumentation, Current and power measurement for electric motors, lighting, air compressor, heating and ventilation system, air-condition equipment and automation – control system.
- Current, power and energy monitoring device.
- Relay protection device.

◆ Circuit connection diagram

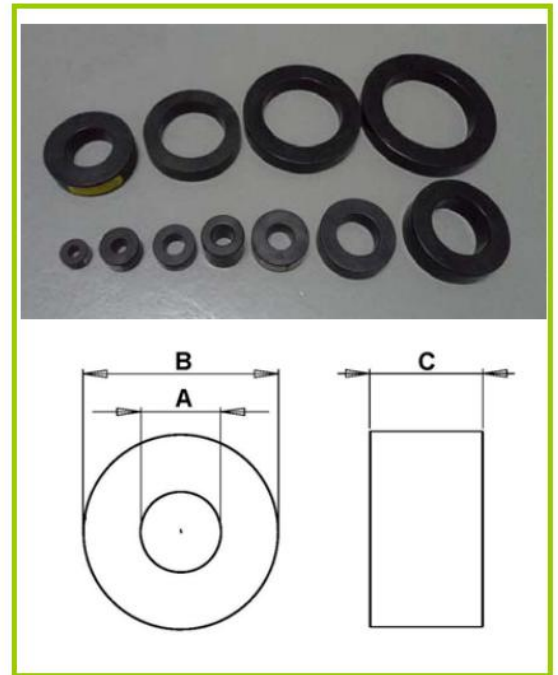

◆ Technique Index

Electrical Parameter	
Frequency	50-400Hz
Rated Input	0-10000A
Measuring range	5%In-120%In
Rated Output	0-100mA
Ratio	$\leq \pm 0.1\%$
Phase angle	$\leq \pm 5$ 分
Dielectric strength	2.5KV/1mA/1min
Insulation Resistance	DC500V/1000MΩ min

Mechanical Parameter	
Case	PBT /UL94-V0
Bobbin	PBT
Core	Permalloy or Nanocrystalline
Internal structure	Epoxy
Construction	-----
Operating Temp	$-25^{\circ}\text{C} \sim +75^{\circ}\text{C}$
Operating Humidity	$\leq 85\%$
Output Connection	Leads

◆ Type Selection

Mfg P/N	Rated Input (A)	Ratio	Burden (Ω)	Accuracy	Dimensions (mm)		
					A	B	C
LB2-9	1-50A	1000: 1 2000: 1 2500: 1 3000: 1 5000: 1	≤ 50	0.1、0.2	9.0	25.0	14.0
LB2-10	1-50A		≤ 50	0.1、0.2	10.0	24.5	14.2
LB2-12	1-80A		≤ 100	0.1、0.2	11.5	33.7	24.5
LB2-13	10-100A		≤ 100	0.1、0.2	13.0	36.0	20.0
LB2-25	20-400A		≤ 200	0.1、0.2	25.0	55.0	20.0
LB2-32	50-600A		≤ 200	0.1、0.2	32.0	60.0	20.0
LB2-45	100-1000A		≤ 200	0.1、0.2	45.0	88.0	24.0
LB2-50	400-1200A		≤ 200	0.1、0.2	50.0	112.0	35.0
LB2-70	600-2000A		≤ 200	0.1、0.2	70.5	105.5	20.3
LB2-80	800-2500A		≤ 200	0.1、0.2	80.0	125.0	30.0
LB2-90	1000-3000A		≤ 200	0.1、0.2	90.0	135.0	42.0
LB2-110	1000-5000A		≤ 200	0.1、0.2	110.0	162.0	42.0
LB2-220	2000-10000A	≤ 200	0.1、0.2	220.0	269.0	36.0	

Miniature Current Transformers

Primary Single-Turn (LB2) Series

Xiamen ZT Technology Co., Limited
Skype: zntarjason, zntarjason@gmail.com, sales@zntar.com www.zntar.com